


**Left Hand Opening Shown
Right Hand Opposite**

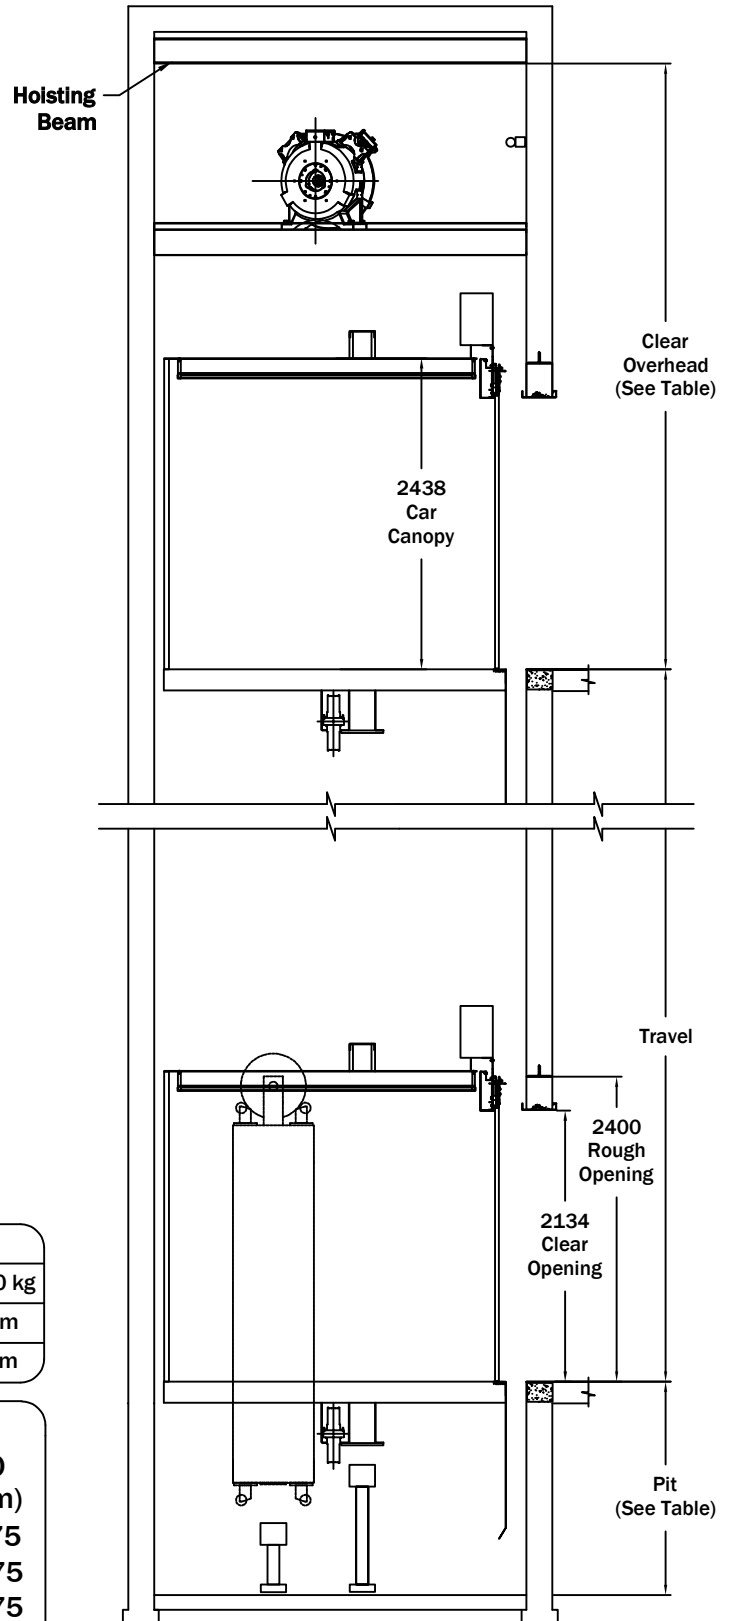

| Speed \ Cap | Pit Depth | | Overhead | |
|----------------|-------------|--------------|-------------|--------------|
| | 950-1587 kg | 1815-2050 kg | 950-1587 kg | 1815-2050 kg |
| 0.75 - 1.0 m/s | 1626 mm | 1676 mm | 4750 mm | 5100 mm |
| >1.0-1.75 m/s | 1676 mm | 1750 mm | 5250 mm | 5400 mm |

Standard Available Sizes

| Capacity (kg) | W (mm) | D (mm) | D* (mm) | IW (mm) | ID (mm) | O (mm) | RO (mm) |
|---------------|--------|--------|---------|---------|---------|--------|---------|
| 950 | 2185 | 2302 | - | 1370 | 1726 | 914 | 1675 |
| 1200 | 2221 | 2608 | - | 1406 | 2032 | 1067 | 1675 |
| 1587 | 2425 | 2608 | - | 1610 | 2032 | 1067 | 1675 |
| 1815 | 2448 | 2940 | - | 1598 | 2364 | 1219 | 1860 |
| 2050 | 2448 | 3130 | - | 1598 | 2554 | 1219 | 1860 |

- D* = D + 102 mm at Rear Entrance Only
- For Seismic Applications, Consult Delta Elevator for Increased Dimension "W"
- Clear Overhead Based Upon 2438mm Car Canopy
- For Car Canopy Height Increase Add Equal Height to Clear Overhead
- With Travel Greater than 60m, Consult Delta Elevator Regarding Design Options