


**Left Hand Opening Shown
Right Hand Opposite**

See Pocket Detail Page
for Rear Pocket Option

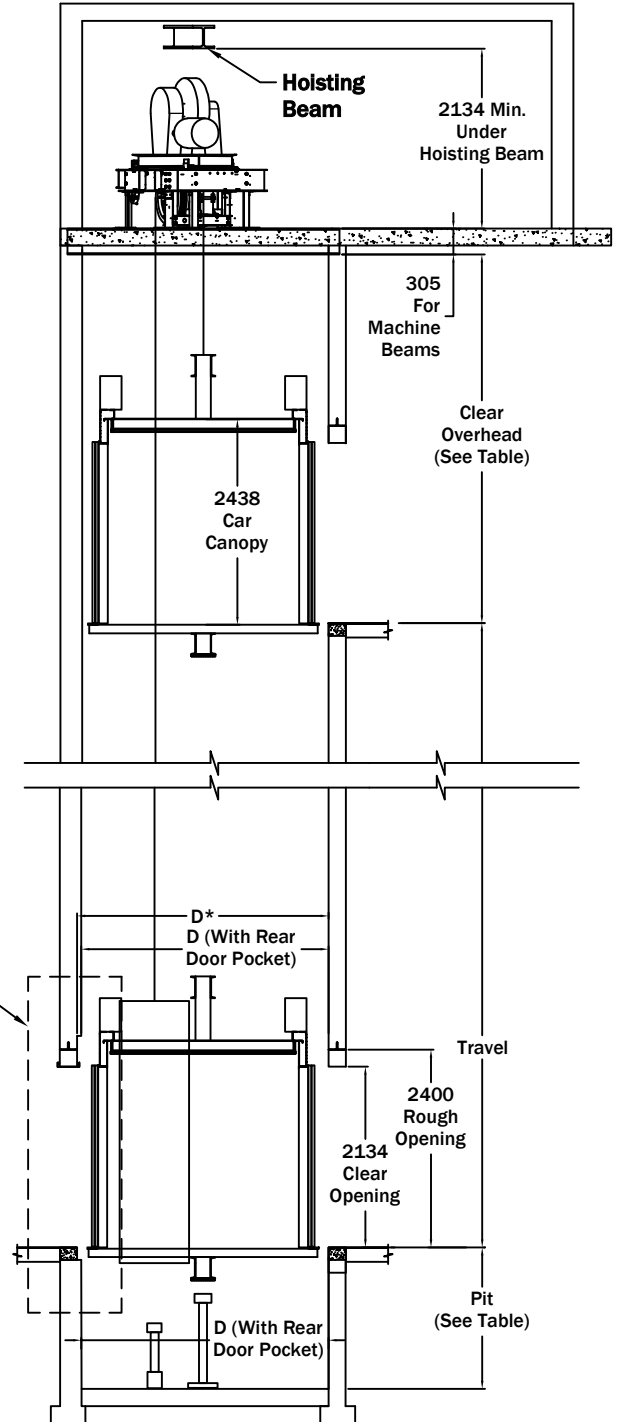

| Speed | Cap | Pit Depth | | Overhead | |
|----------------|-----|-------------|--------------|-------------|--------------|
| | | 950-1587 kg | 1815-2275 kg | 950-1587 kg | 1815-2275 kg |
| 0.75 - 1.0 m/s | | 1626 mm | 1750 mm | 4500 mm | 4575 mm |
| >1.0-1.75 m/s | | 1676 mm | 1750 mm | 4675 mm | 4750 mm |

Standard Available Sizes

| Capacity (kg) | W (mm) | D (mm) | D* (mm) | IW (mm) | ID (mm) | O (mm) | RO (mm) |
|---------------|--------|--------|---------|---------|---------|--------|---------|
| 950 | 2098 | 2512 | 2614 | 1370 | 1726 | 914 | 1675 |
| 1200 | 2134 | 2818 | 2920 | 1406 | 2032 | 1067 | 1675 |
| 1587 | 2388 | 2818 | 2920 | 1610 | 2032 | 1067 | 1675 |
| 1815 | 2426 | 3150 | 3252 | 1598 | 2364 | 1219 | 1860 |
| 2050 | 2426 | 3340 | 3442 | 1598 | 2554 | 1219 | 1860 |
| 2275 | 2576 | 3340 | 3442 | 1698 | 2554 | 1372 | 2010 |

- D* = D + 102 mm at Rear Entrance Only
- For Seismic Applications, Consult Delta Elevator for Increased Dimension "W"
- Clear Overhead Based Upon 2438mm Car Canopy
- Add 305mm to Clear Overhead for Every Car Canopy Increase of 152 to 305mm
- With Travel Greater than 10m, Consult Delta Elevator Regarding Design Options