



RECOMMENDED SIZES FOR STANDARD ELEVATORS WITH HOLELESS HYDRAULIC LIFTING SYSTEMS

CAPACITY (kg)	ENTRANCES	W (mm)	D (mm)	IW (mm)	ID (mm)	O (mm)	RO (mm)
910	FRONT ONLY	2264	2173	1726	1300	914	1475
1160	FRONT ONLY	2540	2173	2032	1300	1067	1675

TO MEET SEISMIC CRITERIA FOR ZONES 2 OR GREATER, CONSULT DELTA ELEVATOR FOR INCREASED HOISTWAY DIMENSIONS "W" AND "D".






WWW.DELTA-ELEVATOR.COM

LIFT TYPE  
PASSENGER ELEVATOR  
HOLELESS HYDRAULIC (HHP)

TITLE  
WIDE CAB – FRONT ENTRANCES ONLY  
SINGLE SPEED AND CENTRE OPENING DOORS

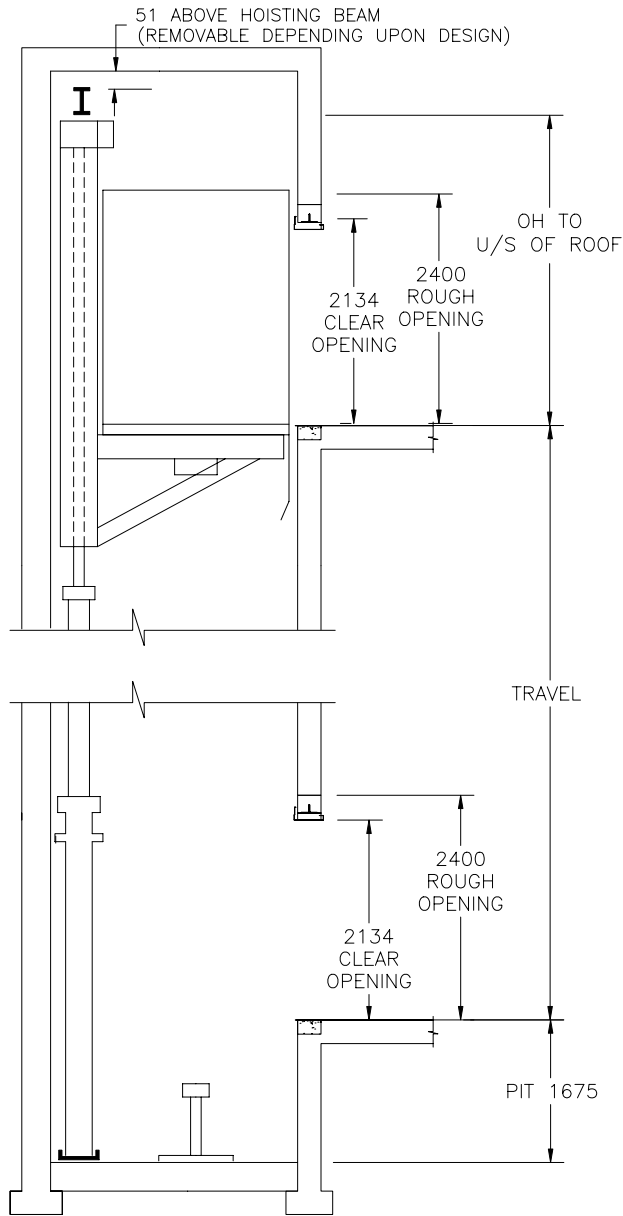

DRAWING NO. HYD-HOLELESS	REV. 1	SHEET 1 OF 2
-----------------------------	-----------	-----------------



OH (OVERHEAD)  
CHART

ELEVATOR	TRAVEL	OH TO U/S ROOF
1 STAGE	3100	3750
2 STAGE	5900	4050
3 STAGE	8400	4150

OH (OVERHEAD HEIGHT) MAY INCREASE DEPENDING ON TRAVEL WITH HOLELESS INSTALLATIONS. (CALL DELTA ELEVATOR FOR DETAILS.)

			
<a href="http://WWW.DELTA-ELEVATOR.COM">WWW.DELTA-ELEVATOR.COM</a>			
LIFT TYPE PASSENGER ELEVATOR HOLELESS HYDRAULIC (HHP)			
TITLE HOISTWAY CROSS SECTION			
DRAWING NO. HYD-HOLELESS	REV. 1	SHEET 2 OF 2	