



**Left Hand Opening Shown
Right Hand Opposite**

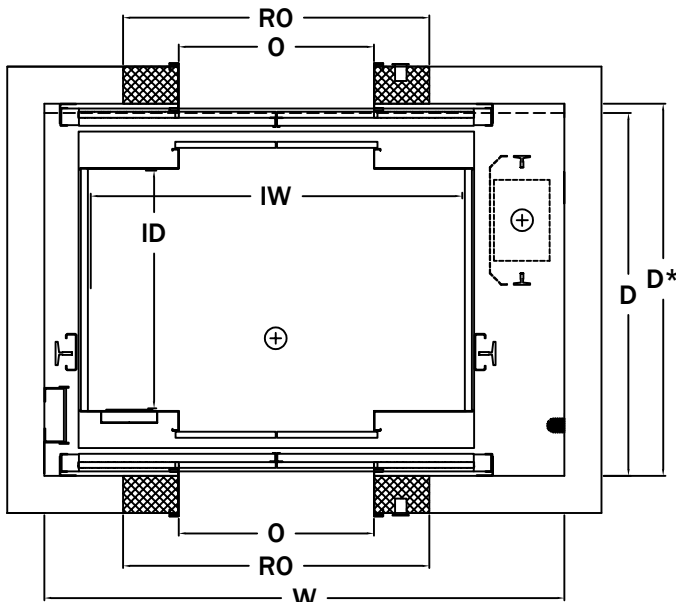

Centre Opening

See Pocket Detail Page
for Rear Pocket Option

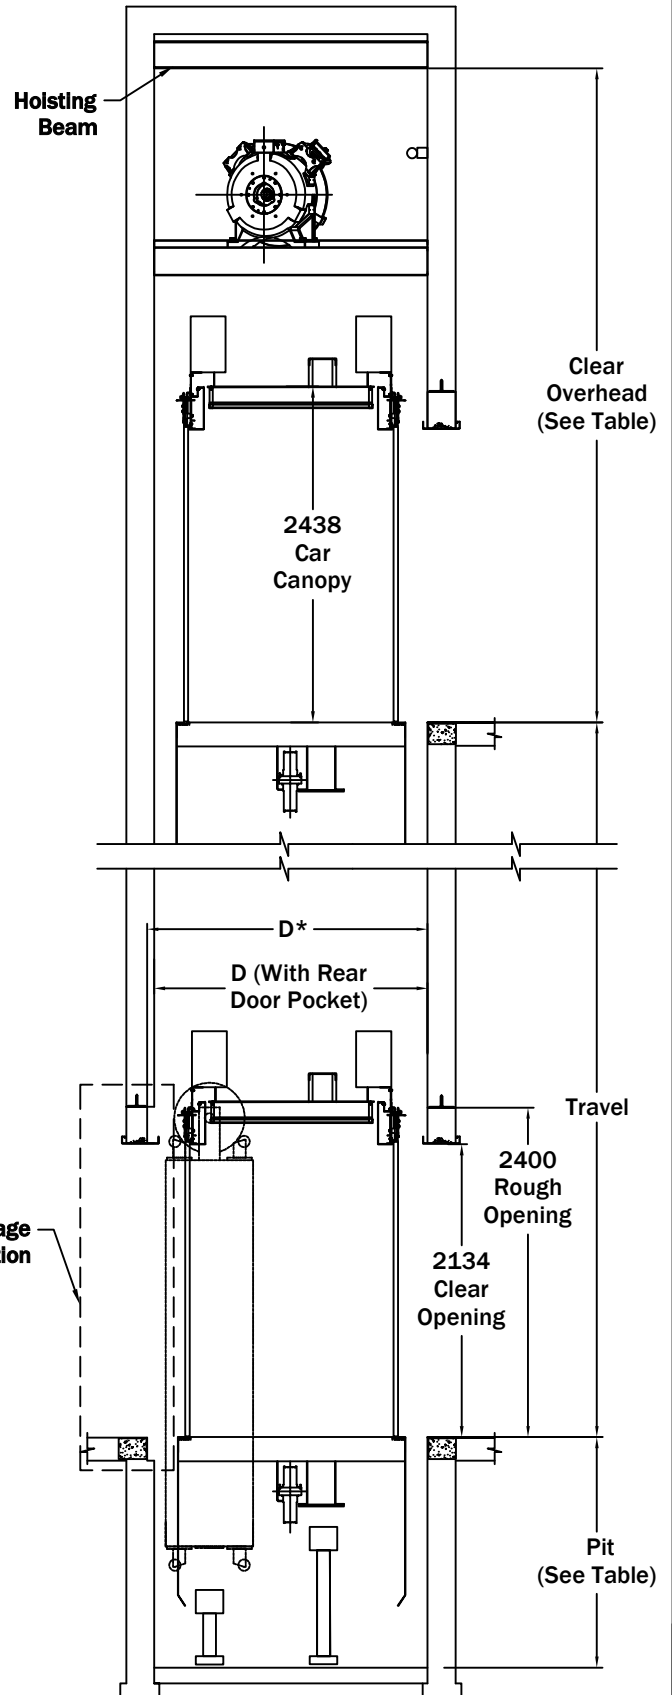

		Pit Depth		Overhead	
Speed	Cap	910-1587 kg	2050 kg	910-1587 kg	2050 kg
0.75 - 1.0 m/s		1626 mm	1676 mm	4750 mm	5100 mm
>1.0-1.75 m/s		1676 mm	1750 mm	5250 mm	5400 mm

Standard Available Sizes

Capacity (kg)	W (mm)	D (mm)	D* (mm)	IW (mm)	ID (mm)	O (mm)	RO (mm)
910	2540	1985	2036	1726	1300	914	1675
1134	2845	1985	2036	2032	1300	1067	1675
1365	2845	2091	2142	2032	1406	1067	1675
1587	2845	2295	2346	2032	1610	1067	1675
2050	2548	3201	3252	1698	2364	1219	1675

- D* = D + 51mm at Rear Entrance Only
- For Seismic Applications, Consult Delta Elevator for Increased Dimension "W"
- Clear Overhead Based Upon 2438mm Car Canopy
- For Car Canopy Height Increase Add Equal Height to Clear Overhead
- With Travel Greater than 60m, Consult Delta Elevator Regarding Design Options