



RECOMMENDED SIZES FOR STANDARD GEARED TRACTION WIDE-CAB ELEVATORS

CAPACITY (kg)	ENTRANCES	W (mm)	D (mm)	D* (mm)	IW (mm)	ID (mm)	O (mm)	RO (mm)
910	FRONT ONLY	2264	2036		1726	1300	914	1475
910	FRONT & REAR	2570	1960	2036	1726	1300	914	1475
1160	FRONT ONLY	2540	2036		2032	1300	1067	1675
1160	FRONT & REAR	2845	1960	2036	2032	1300	1067	1675
1365	FRONT ONLY	2540	2142		2032	1406	1067	1675
1365	FRONT & REAR	2845	2066	2142	2032	1406	1067	1675
1587-A	FRONT ONLY	2540	2346		2032	1610	1067	1675
1587-A	FRONT & REAR	2845	2270	2346	2032	1610	1067	1675

D* = D + 76MM AT REAR ENTRANCE ONLY.
 TO MEET SEISMIC CRITERIA FOR ZONES 2 OR GREATER, CONSULT DELTA ELEVATOR FOR INCREASED DIMENSION "W".






WWW.DELTA-ELEVATOR.COM

LIFT TYPE
 PASSENGER ELEVATOR
 GEARED TRACTION (GTP)


TITLE
 WIDE CAB - FRONT & REAR ENTRANCES
 PLAN VIEW

DRAWING NO. TRACTION	REV. 1	SHEET 1 OF 3
-------------------------	-----------	-----------------

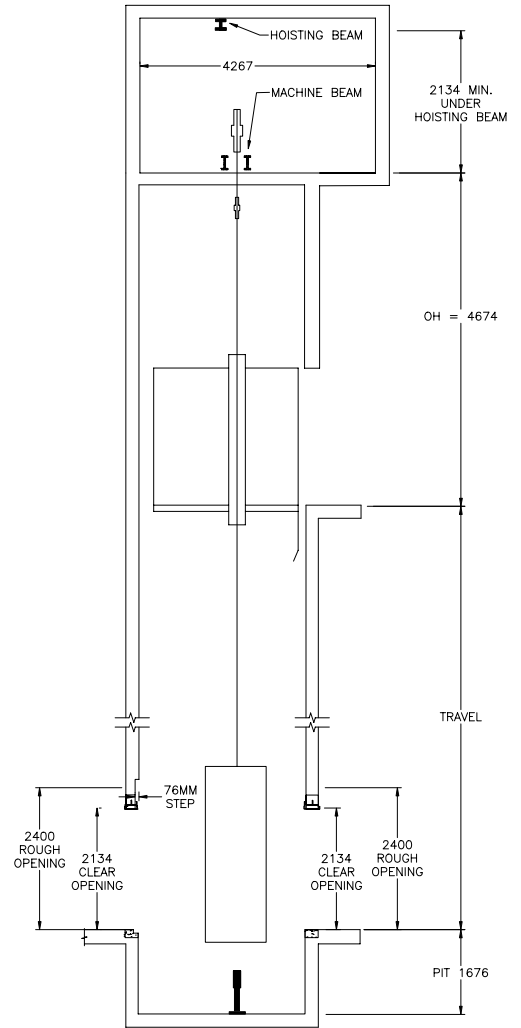
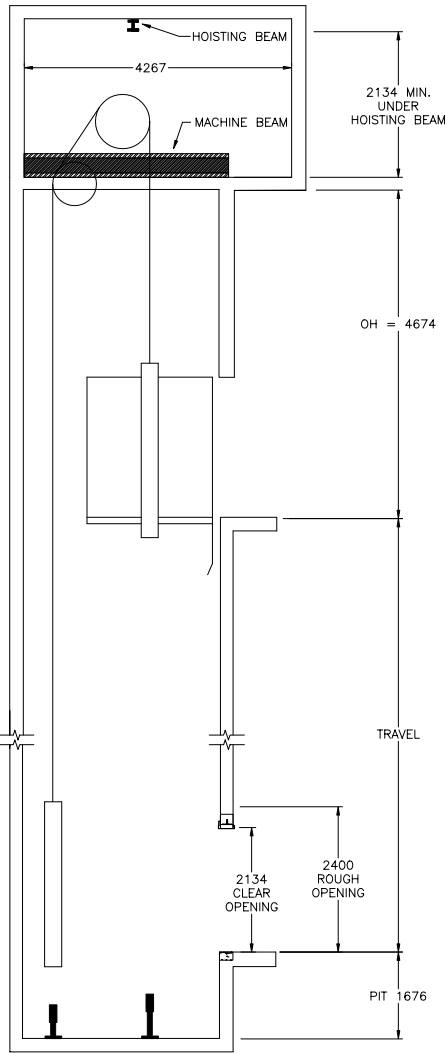


OH (OVERHEAD HEIGHT) WILL INCREASE IF CAB HEIGHT INCREASES BEYOND STANDARD 2438 CAB HEIGHT (2286MM CLEAR INSIDE HEIGHT)



REAR ENTRANCE WALL DETAIL (REQUIRED AT EACH REAR ENTRANCE)

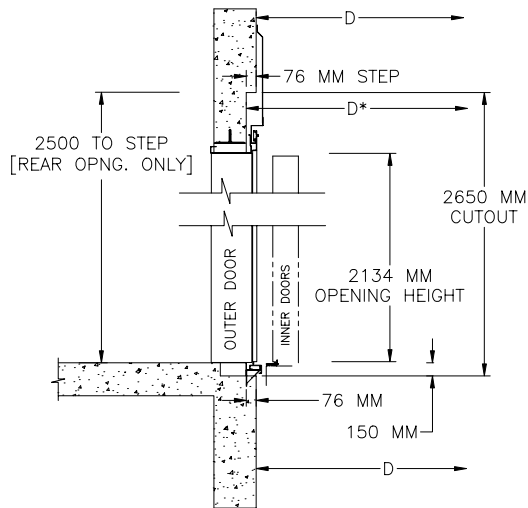

WWW.DELTA-ELEVATOR.COM		
LIFT TYPE PASSENGER ELEVATOR GEARED TRACTION (GTP)		
TITLE WIDE CAB - FRONT & REAR ENTRANCES HOISTWAY CROSS SECTION		
DRAWING NO. TRACTION	REV. 1	SHEET 2 OF 3

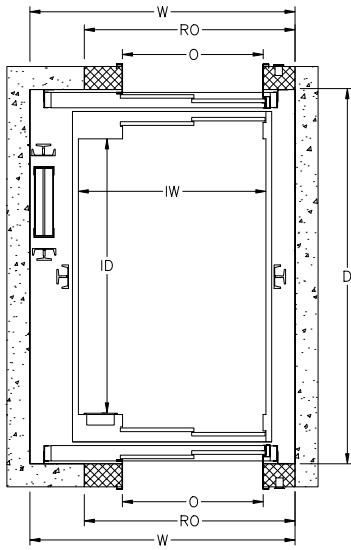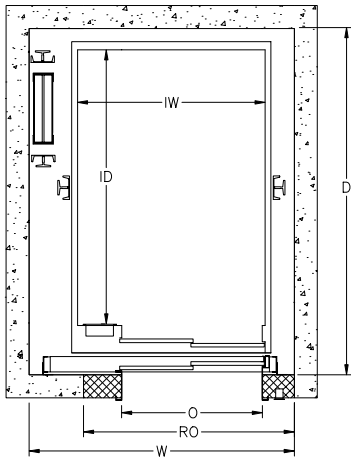

REAR ENTRANCE WALL DETAIL
(REQUIRED AT EACH REAR ENTRANCE)

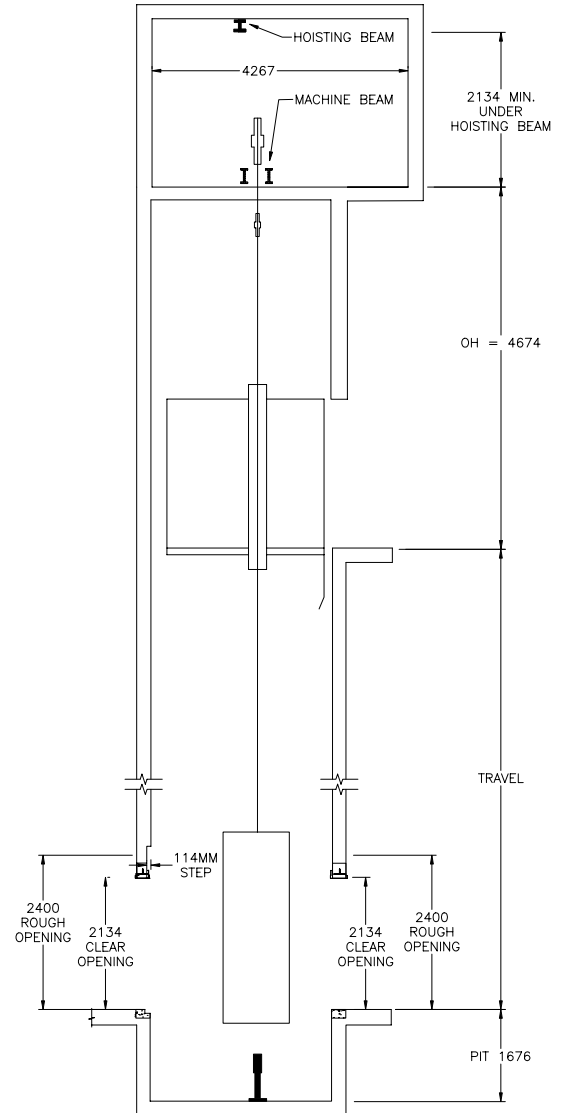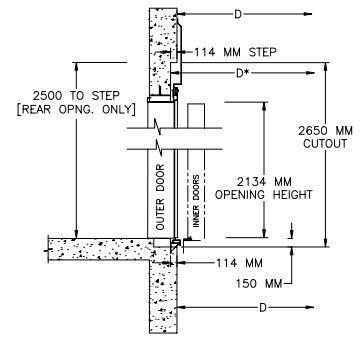

OH (OVERHEAD HEIGHT) WILL INCREASE IF CAB HEIGHT INCREASES BEYOND STANDARD 2438 CAB HEIGHT (2286MM CLEAR INSIDE HEIGHT)

RECOMMENDED SIZES FOR STANDARD GEARED TRACTION DEEP-CAB ELEVATORS

CAPACITY (kg)	ENTRANCES	W (mm)	D (mm)	D* (mm)	IW (mm)	ID (mm)	O (mm)	RO (mm)
1815	FRONT ONLY	2310	2940		1598	2364	1219	1860
1815	FRONT & REAR	2310	3138	3252	1598	2364	1219	1880
2050-B	FRONT ONLY	2588	2940		1698	2364	1219	1880
2050-B	FRONT & REAR	2588	3138	3252	1698	2364	1219	1880
2275-C	FRONT ONLY	2616	3130		1726	2554	1372	2010
2275-C	FRONT & REAR	2616	3328	3442	1726	2554	1372	2010

D* = D + 114MM AT REAR ENTRANCE ONLY.
TO MEET SEISMIC CRITERIA FOR ZONES 2 OR GREATER, CONSULT DELTA ELEVATOR FOR INCREASED DIMENSION "W".

Proudly Canadian

DELTA ELEVATOR

WWW.DELTA-ELEVATOR.COM

LIFT TYPE
PASSENGER ELEVATOR
GEARED TRACTION (GTP)

TITLE
DEEP CAB - ENTRANCES
PLAN VIEW & HOISTWAY CROSS SECTION

DRAWING NO. TRACTION	REV. 1.1	SHEET 3 OF 3
-------------------------	-------------	-----------------